



Manufacturer

Glowway Oy Ltd
Ohdakkeentie 2
06100 Porvoo
Finland

Tel: +358 10 328 7838
info@glowway.com
www.glowway.com
VAT no. FI21396956

TECHNICAL DATA SHEET

GW0062 Installation Cup for Glass Button

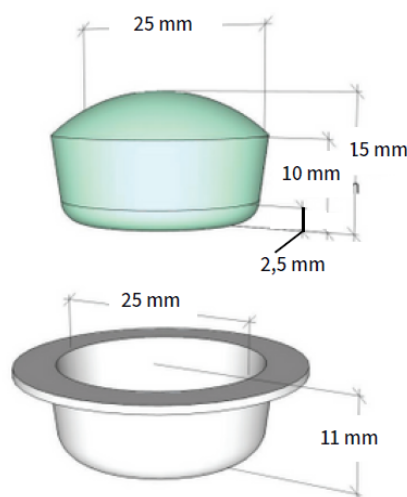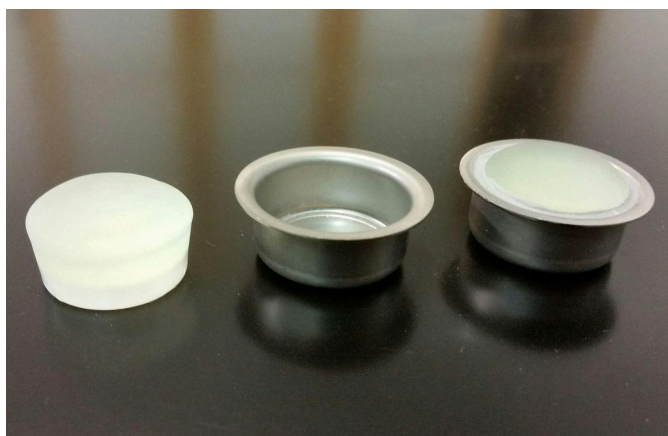

1. PRODUCT DESCRIPTION AND APPLICATIONS

- **Intended use:** A steel mounting cup installed in a drilled hole in the floor, serving as a mounting base for the photoluminescent glass stud GW0009.
- **Functionality:** The cup automatically sets the installed glass stud to the correct and standardized height level, exactly 5 mm above the finished floor surface.
- **Structural safety:** With proper adhesive sealing, the cup prevents dirt, moisture, and water from penetrating between the cup and the floor material.

2. DIMENSIONS AND COMPATIBILITY

- **Material:** Acid-proof steel.
- **Structure:** Equipped with a 3 mm collar/flange.
- **Nominal dimensions:**
 - Height/depth: 11 mm.
 - Cup width/diameter: Top edge 26 mm, bottom 25 mm.
 - Total collar diameter: 35 mm.
- **Compatibility:** Designed to fit perfectly with the green, surface-roughened GW0009 glass stud.

3. STRUCTURAL PROVISIONS (Design Guidelines)

- **Required installation space in the floor (Drilling provision):** Diameter/width 28 mm, depth 13 mm.
- **Recommended adhesive compound:** High-quality polymer adhesive and sealant (e.g., Würth polymer adhesive).

ALL RIGHTS RESERVED. This document is the property of Glowway Oy Ltd and may not be copied, disclosed to a third party, or used for any other unauthorized purpose without the written permission of Glowway Oy Ltd.